

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Applicant: Kazuaki KIDOKORO *et al.*  
Title: IMAGE PROCESSING APPARATUS  
Appl. No.: Not yet assigned  
Filing Date: August 18, 2000  
Examiner: Not yet assigned  
Art Unit: Not yet assigned

**UTILITY PATENT APPLICATION**  
**TRANSMITTAL**

Assistant Commissioner for Patents  
Box PATENT APPLICATION  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) is the nonprovisional utility patent application of:

Kazuaki KIDOKORO  
Nobuhisa YODA  
Tatsuya HARAGUCHI  
Kazuhiro OGURA

Enclosed are:

- [ X ] Specification, Claim(s), and Abstract (25 pages).
- [ X ] Formal drawings (5 sheets, Figures 1-9)
- [ X ] Unexecuted Declaration and Power of Attorney (4 pages)
- [ X ] Claim for Convention Priority
- [ X ] Certified copy of priority document (Japanese Patent Application No. 11 -234087 filed August 20, 1999)

The filing fee is calculated below:


	Claims as Filed	Included in Basic Fee	Extra Claims	Rate	Fee Totals
Basic Fee				\$690.00	\$690.00
Total Claims:	12	- 20	= 0	x \$18.00	= 0.00
Independents:	3	- 3	= 0	x \$78.00	= 0.00
If any Multiple Dependent Claim(s) present:				+ \$260.00	= 0.00
Surcharge Fee (37 C.F.R. 1.16(e))				+ \$130.00	= \$130.00
				SUBTOTAL:	= \$820.00
[ ]				Small Entity Fees Apply (subtract ½ of above):	= \$0.00
				TOTAL FILING FEE:	= \$820.00

- [ ] A check to cover the \$820.00 filing fee is enclosed.
- [ X ] The required filing fees are not enclosed but will be submitted in response to the Notice to File Missing Parts of Application.
- [ ] The Assistant Commissioner is hereby authorized to charge any additional fees which may be required regarding this application under 37 C.F.R. §§ 1.16-1.17, or credit any overpayment, to Deposit Account No. 19-0741. Should no proper payment be enclosed herewith, as by a check being in the wrong amount, unsigned, post-dated, otherwise improper or informal or even entirely missing, the Assistant Commissioner is authorized to charge the unpaid amount to Deposit Account No. 19-0741.

Please direct all correspondence to the undersigned attorney at the address indicated below.

Respectfully submitted,

By

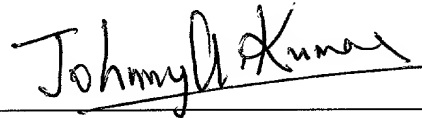

Date: August 18, 2000

FOLEY & LARDNER  
3000 K Street, N.W., Suite 500  
P.O. Box 25696  
Washington, D.C. 20007-8696  
Telephone: (202) 672-5300  
Facsimile: (202) 672-5399

Johnny A. Kumar  
Attorney for Applicant  
Registration No. 34,649



5

10

20

25

5  
10  
15  
20  
25

As described above, the captured images have to be confirmed by accessing the external systems after the image capture, and the operations the user has to be for this confirmation are very troublesome.

To attain the above purpose, the present invention provides an image processing apparatus comprising: a scanner for reading an image from a document; a designation button for associating document read processing performed by the scanner with the processing performed with respect to the image read by the scanner; an input section for inputting output contents which represent processing results preset for the designation button, when results of processing preset for the designation button are output; a controller for controlling execution of the processing preset for the designation button when the designation button is operated; and output means for outputting processing results in accordance with the output contents which

represent processing results and which are input from the input means, when processing preset for the designation button is executed by the controller.

The present invention also comprises an image processing apparatus which is basically made up of a scanner for reading a document and a printer for forming an image read by the scanner on an image formation medium, and which comprises: a designation button for associating document read processing by the scanner with the processing performed with respect to the image read by the scanner; an input section for inputting image formation contents which represent processing results preset for the designation button, when the printer performs the image formation on the image formation medium by printing the processing results preset for the designation button; and a controller for executing the processing preset for the designation button when the designation button is designated, and for further controlling the printer to execute the image formation on the image formation medium by printing the processing results preset for the designation button, based on the image formation contents which represents the processing results and input from the input section.

The present invention further provides an image processing method used in an image processing apparatus provided with a scanner for reading a document image,

the method comprising: a first step of associating document read processing performed by the scanner with the processing performed with respect to the image read by the scanner, and setting a designation button in accordance with association; a second step of setting the designation button in accordance with output contents used when processing results that are set for the designation button in the first step are output; a third step of executing the processing that is associated in the first step by use of the designation button, when the designation button is operated; and a fourth step of outputting results of the processing executed in the third step in accordance with the output contents, if the output contents are set for the designation button in the second step, the results of processing being output when the processing associated by use of the designation button is executed in the third step.

Additional objects and advantages of the invention will be set forth in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention may be realized and obtained by means of the instrumentalities and combinations particularly pointed out hereinafter.

#### BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

The accompanying drawings, which are incorporated

in and constitute a part of the specification,  
illustrate presently preferred embodiments of the  
invention, and together with the general description  
given above and the detailed description of the  
5 preferred embodiments given below, serve to explain the  
principles of the invention.

FIG. 1 is a block diagram showing a schematic  
structure of an image capturing apparatus according to  
an embodiment of the present invention.

10 FIG. 2 shows an operation button setting data  
section of the image capturing apparatus.

FIG. 3 shows an example of a system including the  
image capturing apparatus.

15 FIG. 4 is a flowchart illustrating the processing  
executed by the image capturing apparatus.

FIG. 5 shows a basic operation menu.

FIG. 6 shows an edit menu for editing an operation  
button.

FIG. 7 shows a print setting menu.

20 FIG. 8 shows a confirmation menu for displaying a  
print result.

FIG. 9 shows an output example of a print result.

#### DETAILED DESCRIPTION OF THE INVENTION

25 An embodiment of the present invention will now be  
described with reference to the accompanying drawings.

First of all, the structure of an image capturing  
apparatus will be described. The image capturing

008130" 8EEF4960



apparatus is an example of an image processing apparatus according to one embodiment of the present invention.

FIG. 1 is a block diagram showing a schematic structure of the image capturing apparatus. As shown in FIG. 1, the image capturing apparatus comprises a scanner apparatus 1, a display device 2, an input device (an input section) 3, and a system control section (a controller) 4.

The scanner apparatus 1 is a hardware component serving as a scanner, and creates an electronic image from a printed sheet document. The display device 2 is a liquid crystal display unit with a built-in touch panel, and the input device 3 is an unsophisticated or simplified keyboard. The display device 2 displays the settings of the scanner apparatus 1 and the operation that is being executed. The input device 3 is used for receiving inputs from users. The system control section 4 controls the devices described above.

The system control section 4 includes an image processing section 5, an operation button setting data section 6, an external system connection section 7, and a print output section 8.

The image processing section 5 processes an image input from the scanner apparatus 1 in accordance with setting contents in the operation button setting data section 6. The external system connection section 7 is

a section that accesses an external system when an image captured through the scanner apparatus 1 is registered or transferred to that external system. The external system is specifically a file server, a database system, a mail system, or the like.

The operation button setting data section 6 stores a plurality of setting data regarding operation buttons of the scanner apparatus 1 displayed in the display device 2. In the operation button setting data section 6, processing contents that are executed when an operation button is operated are stored. FIG. 2 is an example of the operation button setting data section 6.

The image capturing apparatus of the above structure is connected to a network. A printer apparatus 9 and a file server 10 are also connected to the network.

As shown in FIG. 2, the operation button setting data section 6 has an item 11 in which a plurality of button IDs are set forth, and each button ID includes a button name 12, a document creator 13, a processing content (i.e., the kind of processing) 14, a processing parameter 15, and a capture parameter 16.

In the button ID item, a plurality of IDs for identifying the respective operation buttons are recorded. The operation button identified by each button ID has a button name that enables users to know the operation content, and the button name is set in

the button name item 12. In the document creator item 13, the name of the document creator, i.e., the person who determines the settings of the operation button, is recorded. In the processing kind item 14, the kind of processing assigned to the operation button is recorded. The kind of processing is related to the external system to which an image input by use of the operation button is transmitted, and is therefore determined after that external system is selected from available external systems.

The kind of processing is specified by a processing parameter. In the processing parameter item 15, processing parameters corresponding to selected external systems are recorded. In the capture parameter item 16, scan parameters that are preset for the operation buttons are recorded.

By way of example, let us consider the case where the operation of saving data in the file server 10 is assigned to an operation button of the operation button setting data section 6. In this case, the system control section 4 records an image, which is read from the scanner apparatus 1 beforehand, in the file server 10 on the network as a file.

The system control section 4 controls the print output section 8 so that the printer apparatus 9 connected to the network can print out the image input from the scanner apparatus 1. In the present

embodiment, the printer apparatus 9 is connected to the image capturing apparatus through the network. However, this does not restrict the present invention. For example, a digital copying machine serves as both a scanner apparatus 1 and a printer apparatus 9, and the use of the digital copying machine is similar to the above-described embodiment except that the print output destination is inside the machine. The present invention can be applied to this case as well without the spirit of the invention changed.

FIG. 3 shows an example of a system including the image capturing apparatus.

In the system shown in FIG. 3, a plurality of personal computers (PC: clients) 19, a digital copying machine 17 having a scanner function, and a file server 18 are connected to a local area network (LAN) 20.

With this structure, each PC 19 can receive and use a document image that is read by use of the scanner function of the digital copying machine 17. In other words, the scanner function of the digital copying machine 17 can be shared by the PCs 19.

Although not shown, the digital copying machine 17 is provided with a keyboard, a mouse, a display section, a LAN board, etc.

The digital copying machine 17 has both a scanner function and a printer function. It incorporates a CPU (a control section) and a memory, and by use of these

controls it reads a program out of an HDD and controls the hardware. The digital machine 17 is operated by means of a touch panel (i.e., an input section). The digital copying machine 17 also incorporates a network control device and can access the file server 18 through the network 20.

The user can access the file server 18 through the network 20 by using the PC 19 as a client.

FIG. 4 is a flowchart illustrating how the processing executed by the image capturing apparatus of the above structure operates.

When the image capturing apparatus is started up, the system control section 4 displays a basic operation menu 2a on the touch panel (input device) 3, and waits for the user to enter an input (Step 1). As shown in FIG. 5, the basic operation menu 2a has, for example, the following: various operation buttons (designation buttons) 21-24, a next-page button 25, a button edit key 26, and a print setting button 27. The operation buttons 21-24 are selectively operated to execute operations preset for them. The displayed names of the operation buttons 21-24 are set and registered in the operation button setting data section 6. The next-page button 25 is displayed when the number of operation buttons is too large to display on one menu. When the next-page button 25 is operated, the operation buttons of the next group are shown.

When the user operates the button edit key 26 to select the editing of the operation buttons (Step 2), an edit menu 2b used for editing the operation buttons is displayed, as shown in FIG. 6. On the edit menu 2b, a button ID, a button name, a document creator, the kind of processing, a processing parameter, and a capture parameter are indicated. These items are indicated by numerals 28-33, respectively. A setting key and a cancel key are also indicated.

The user enters data in the items 28-33 by operating the input device 3, and touches the setting key. As a result, the editing or preparation of the operation buttons is completed (Step 3), and operation button settings entered by the user are recorded in the operation button setting data section 6. The operation button settings are displayed on the basic operation menu 2a shown in FIG. 5.

When the user operates the print setting button 27 to select a print setting mode (step 4), the system control section 4 controls the display device 2 to shown a print setting menu 2c, as shown in FIG. 7. On the print setting menu 2c, contents of various items 34-38, such as "printer", "printing", "printed image", "printing of settings" and "confirmation of results" are displayed as setting buttons by the touch panel (input device) 3. An OK key and a cancel key are also indicated.

The print settings on the print setting menu 2c are determined so as both to process an image from the scanner apparatus 1 in accordance with the settings corresponding to an operation button and to print out the image (Step 5).

The printing settings on the print setting menu 2c will be described.

In the item 34 of the "printer", a printer device used for output is designated. In the example shown in FIG. 7, "local" is indicated in that item, which means that the scanner apparatus 1 and the printer apparatus 9 are incorporated in the same apparatus.

In the item 35 of the "printing", a manner of printing is designated by selecting a "list" key 35a, an "equal magnification" key 35b, or a "non-printing" key 35c. For example, when the "list" key 35a is selected, thumbnail images (e.g., reduced images) of input images corresponding to a plurality of pages are printed out in such a manner that the list contain a preset number of pages. When the "equal magnification" key 35b is selected, an input image is printed with the same magnification. When no print output is required, the "non-printing" key 35c is selected.

In the Item 36 of the "print image", an image to be output is determined by selecting either an "input image" key 36a or a "registered image" key 36b. When the "input image" key 36a is selected, an image input

from the scanner apparatus is designated for printing. When the "registered image" key 36b is selected, an image registered in an external system is designated as an image to be read out and printed. The reason the  
5 "registered image" key 36b is provided is that an input image cannot be always registered in the external system. In other words, the image may not be correctly registered due to some error. This being so, the registered image is printed for confirmation. By using  
10 this function, it is possible to confirm whether an input image from the scanner apparatus has been successfully transmitted to the external system.

In the item 37 of the "printing of settings", either a "Yes" key 37a or a "No" key 37b is selected to  
15 designate whether the setting contents corresponding to an operation button should be added when an image is to be printed. By including the setting contents corresponding to the operation button in the printed image, it is possible to confirm not only the image  
20 itself but also the processing executed with respect to the image.

The item 38 of the "confirmation of results" enables the user to determine whether to perform the processing preset for the operation button. The user  
25 can determine this on the touch panel of the scanner apparatus 1, in accordance with a print output result. To be more specific, when the processing registered for

008780" ECT4950



the operation button should be executed after the confirmation of the result of printing, a "Yes" key 38a is designated. When the processing registered for the operation button should be executed without reference to the result of printing, a "No" key 38b is designated.

Owing to this process, the user can look at a print output to check whether a document skews when it is read, or if there is a not-read page. After confirming these, the user can determine whether or not to execute the processing preset for the operation button.

When the "OK" key on the touch panel is selected after the contents of the items 34-38 of the print setting menu 2c are determined, the print setting contents are stored and take effect.

Next, one of the operation buttons of the basic operation menu 2a shown in FIG. 5 is operated (Step 6). In response to this, the system control section 4 controls the scanner apparatus 1 to start reading an original in accordance with the capture parameter preset for the operation button selected in the operation button setting data section 6 (Step 7).

Then, the document is read in accordance with the parameter corresponding to the operation button. After the start of this read operation, the system control section 4 determines whether or not the printing for the "input image" in the item of the "print image" is

selected under the print settings shown in FIG. 7  
(Step 8). When the determination shows that the  
printing for the input image is selected under the  
print settings, the input image is printed in  
5 accordance with the print settings (Step 9). In the  
case where the confirmation of the result of printing  
is designated by the print settings (Step 10), the  
system control section 4 displays a print result  
confirmation menu 2d, such as that shown in FIG. 8.  
10 This menu is displayed at the end of the print output  
of the input image. In the print result confirmation  
menu 2d, either an "execute" key 39a or a "cancel" key  
39b is designated (Step 11). By this designation, it  
is possible to determine whether the processing preset  
15 for the operation button should be executed or canceled.

Where it is determined in Step 8 that the printing  
for the "input image" is not performed, where it is  
determined in Step 10 that the confirmation of the  
result of printing is not performed, or where it is  
20 determined in Step 11 that the processing should be  
continued, by checking that the "execute" key 39a in  
the print result confirmation menu 2d is operated, the  
system control section 4 transmits a captured image to  
an external system in accordance with the settings of  
25 an operation button (registration processing) (Step 12).

When the printing of the "registered image" is  
selected in the "print image" item 36 of the print

5           This processing is intended to confirm that an  
image registration has been successfully executed in  
Step 12. Hence, the registered image is read out from  
the external system, which is the registration  
destination, and printed out. For example, where a  
0   file server is designated as a registration destination,  
an image that is stored as a file in the designated  
directory of the file server is read and printed out.

When the results of printing are satisfactory, the user designates the "execute" key 39a (Step 16), and the processing is brought to an end. If the "cancel" key 39b is designated in the print result confirmation menu 2d shown in FIG. 8, the system control section 4 deletes the image registered in the external system

(Step 17) since the registration processing of the input image is being executed then. Then, the processing starting from Step 1 is executed again.

FIG. 9 shows an example of a print result output by the present apparatus. The example is a list of thumbnail images of input images, the thumbnail images being printed out together with the setting contents preset for the operation button.

By looking at the print output, the user can confirm whether or not the document has been successfully input. The user can also know to which external system, and in what manner, the image is to be output. Further, the user can know how it is registered.

As described above, a digital copying machine is provided with both a scanner function and a printer function, and the use of such a digital copying machine means that a scanner apparatus has a printout function as well. That is, an input image can be transmitted to a final registration/transfer destination and printed out by operating only the scanner apparatus. Owing to this feature, the user need not check the image output to the final registration destination; the user is only required to confirm the printed image. Hence, the confirmation of captured images does not impose a heavy load on the user.

As detailed above, the present invention can



WHAT IS CLAIMED IS:

1. An image processing apparatus comprising:  
a scanner for reading an image from a document;  
a designation button for associating document read  
5 processing performed by the scanner with processing  
performed with respect to the image read by the  
scanner;  
an input section for inputting output contents  
which represent processing results preset for the  
10 designation button, when results of processing preset  
for the designation button are output;  
a controller for controlling execution of the  
processing preset for the designation button when the  
designation button is operated; and  
15 output means for outputting processing results in  
accordance with the output contents which represent  
processing results and which are input from the input  
means, when the processing preset for the designation  
button is executed by the controller.  
20 2. An image processing apparatus according to  
claim 1, wherein said input section includes a setting  
button used for determining whether or not processing  
contents associated by use of the designation button  
should be output together with the image that is read  
25 by the scanner under control performed by the control  
section.  
3. An image processing apparatus according to

5

10

15

20

25

a controller for executing the processing preset

for the designation button when the designation button  
is designated, and for further controlling the printer  
to execute the image formation on the image formation  
medium by printing the processing results preset for  
the designation button, based on the image formation  
5 contents which represents the processing results and  
input from the input section.

6. An image processing apparatus according to  
claim 5, wherein said input section includes a setting  
10 button used for determining whether or not processing  
contents associated by use of the designation button  
should be output together with the image that is read  
by the scanner under control performed by the control  
section.

7. An image processing apparatus according to  
claim 5, wherein said input section includes a setting  
15 button used for confirming whether or not the  
processing performed with respect to the image read by  
the scanner should be continued after the image that is  
read by the scanner under control performed by the  
20 control section is output.

8. An image processing apparatus according to  
claim 5, wherein said input section includes a setting  
button used for determining which image, the image read  
25 by the scanner under control performed by the control  
section or an image obtained by processing the image  
read by the scanner, should be output.





scanner in the third step.

11. An image processing method according to claim 9, wherein said second step includes a step of confirming whether or not the processing performed with respect to the image read by the scanner should be continued after the image that is read by the scanner in the third step is output.

12. An image processing method according to claim 9, wherein said second step includes a step of determining which image, the image read by the scanner in the third step or an image obtained by processing the image read by the scanner, should be output.

## 5

10

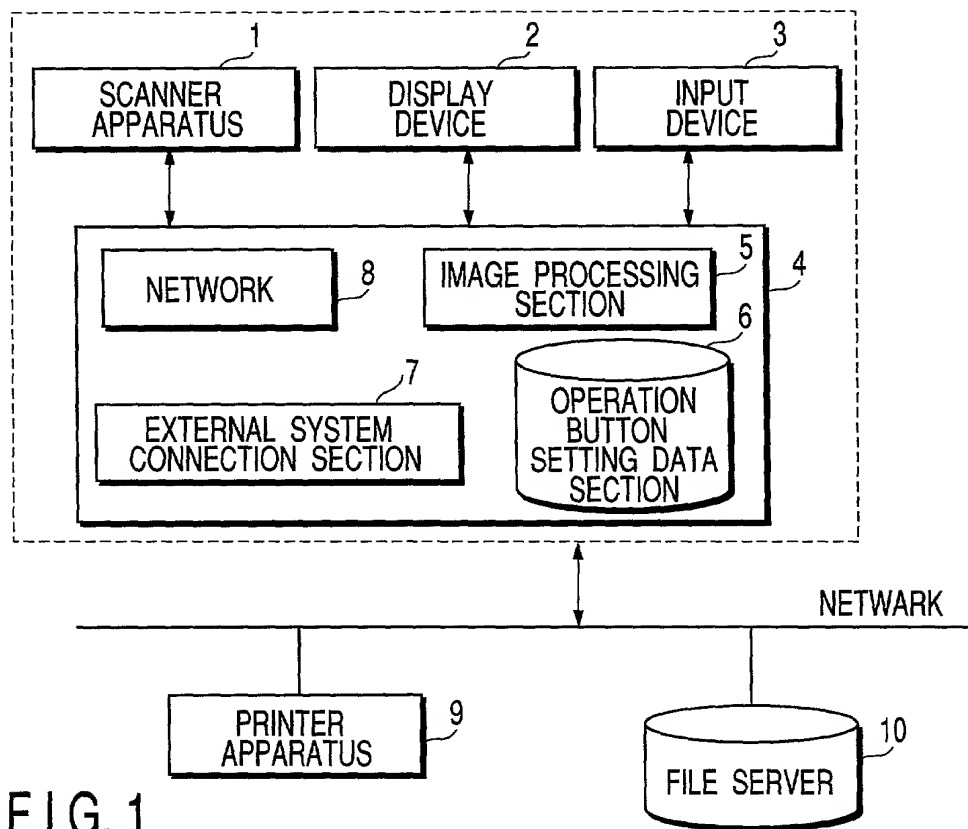


FIG. 1

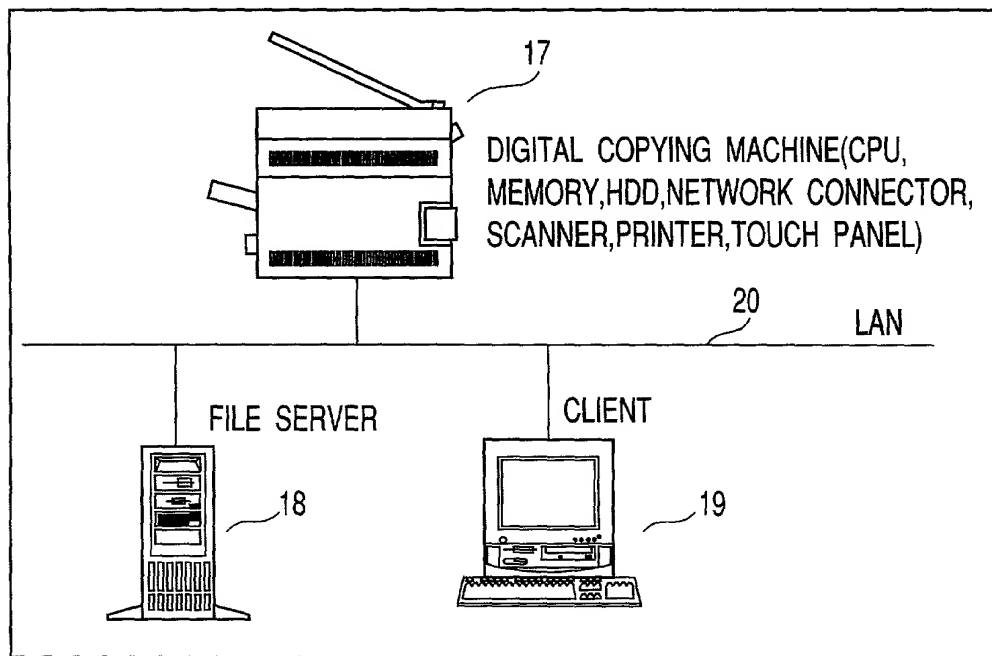


FIG. 3


11	12	13	14	15	16
ID	BUTTON NAME	DOCUMENT CREATOR	PROCESSING CONTENT	PROCESSING PARAMETER	CAPTURE PARAMETER
1	CAPTURE CATALOG	TAKAHASHI	STORE DATA IN FILE SERVER	TO ¥IMG¥CATALOGI, IN BITMAP FORMAT	600DPI, MONOCHROMATIC TEXT MODE
2	CAPTURE LEAVE APPLICATION FORM	YOSHIDA	STORE DATA IN FILE SERVER	TO ¥IMG¥APPLICATION, IN TIFF FORMAT	300DPI, FULL COLOR
3	CAPTURE MINUTES OF BUSINESS MEETING	YOSHIDA	SEND MAIL	TO take@TOKYO.co.jp IN BITMAP FORMAT	300DPI, MONOCHROMATIC TEXT MODE
4	CAPTURE CATALOG OF NEW PRODUCT	MIKI	DB REGISTRATION	DB1	300DPI, MONOCHROMATIC PHOTOGRAPH MODE
::	::	::	::	::	::

FIG. 2


A




FIG. 8

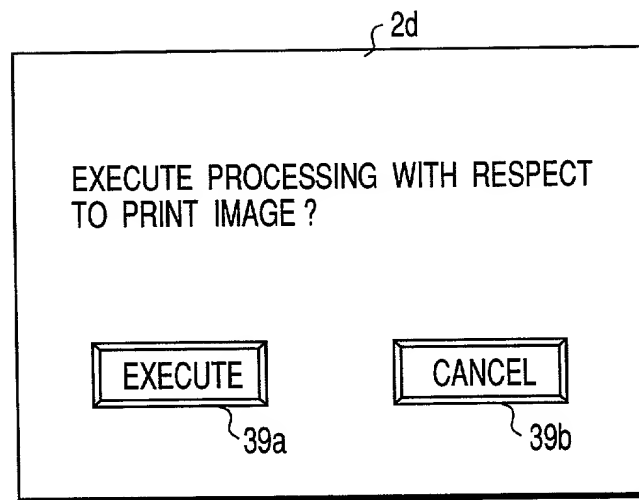


BUTTON NAME : 「CAPTURE CATALOG」 (DOCUMENT CREATOR:  
 CAPTUER DATE : 1999/08/17 17:30 TAKAHASHI)  
 PROCESSING CONTENT : SEND DATA TO ¥IMG¥CATALOG1  
 AND STORE THEM IN BITMAP FORMAT  
 CAPTURE PARAMETER : 600DPI MONOCHROMATIC TEXT MODE  
 TOTAL NUMBER OF PAGES : 4 PAGES




PAGE 1



PAGE 2



PAGE 3



PAGE 4

FIG. 9





Prior Foreign Application Number	Country	Foreign Filing Date	Priority Claimed?	Certified Copy Attached?
11-234087	Japan	August 20, 1999	Yes	

I HEREBY CLAIM the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

U.S. Provisional Application Number	Filing Date

I HEREBY CLAIM the benefit under Title 35, United States Code, §120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Application Number	Parent Filing Date	Parent Patent Number

I HEREBY APPOINT the following registered attorneys and agents of the law firm of FOLEY & LARDNER to have full power to prosecute this application and any continuations, divisions, reissues, and reexaminations thereof, to receive the patent, and to transact all business in the United States Patent and Trademark Office connected therewith:

STEPHEN A. BENT	Reg. No. 29,768
DAVID A. BLUMENTHAL	Reg. No. 26,257
BETH A. BURROUS	Reg. No. 35,087
ALAN I. CANTOR	Reg. No. 28,163
WILLIAM T. ELLIS	Reg. No. 26,874
JOHN J. FELDHAUS	Reg. No. 28,822
PATRICIA D. GRANADOS	Reg. No. 33,683
JOHN P. ISACSON	Reg. No. 33,715
MICHAEL D. KAMINSKI	Reg. No. 32,904
LYLE K. KIMMS	Reg. No. 34,079
KENNETH E. KROSIN	Reg. No. 25,735
JOHNNY A. KUMAR	Reg. No. 34,649
GLENN LAW	Reg. No. 34,371
PETER G. MACK	Reg. No. 26,001
BRIAN J. MC NAMARA	Reg. No. 32,789
SYBIL MELOY	Reg. No. 22,749
RICHARD C. PEET	Reg. No. 35,792
GEORGE E. QUILLIN	Reg. No. 32,792
COLIN G. SANDERCOCK	Reg. No. 31,298
BERNHARD D. SAXE	Reg. No. 28,665
CHARLES F. SCHILL	Reg. No. 27,590
RICHARD L. SCHWAAB	Reg. No. 25,479
HAROLD C. WEGNER	Reg. No. 25,258

and I request that all correspondence be directed to:

Johnny A. Kumar  
 FOLEY & LARDNER  
 3000 K Street, N.W., Suite 500  
 P.O. Box 25696  
 Washington, D.C. 20007-8696

Telephone: (202) 672-5489  
 Facsimile: (202) 672-5399

I UNDERSTAND AND AGREE THAT the foregoing attorneys and agents appointed by me to prosecute this application do not personally represent me or my legal interests, but instead represent the interests of the legal owner(s) of the invention described in this application.

I FURTHER DECLARE THAT all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Name of first or sole inventor	Kazuaki KIDOKORO
Residence	Yokohama-shi, Japan
Country of Citizenship	Japan
Post Office Address	Isogo Apart, 5-3, Shiomidai 2-chome, Isogo-ku, Yokohama-shi, Kanagawa-ken, Japan
Inventor's signature	
Date	
Name of second inventor	Nobuhisa YODA
Residence	Kamakura-shi, Japan
Country of Citizenship	Japan
Post Office Address	1-22-8, Tsunishi, Kamakura-shi, Kanagawa-ken, Japan
Inventor's signature	
Date	
Name of third inventor	Tatsuya HARAGUCHI
Residence	Yokohama-shi, Japan
Country of Citizenship	Japan
Post Office Address	1402, View Court Kominato 3 Goto, 1-2, Kominatocho 1-chome, Naka-ku, Yokohama-shi, Kanagawa-ken, Japan
Inventor's signature	
Date	

Name of fourth inventor	Kazuhiro OGURA
Residence	Kawasaki-shi, Japan
Country of Citizenship	Japan
Post Office Address	329, Kureare Toshiba Motosumiyoshi, 1931, Kizukisumiyoshicho, Nakahara-ku, Kawasaki-shi, Kanagawa-ken, Japan
Inventor's signature	
Date	

002.376740-016907